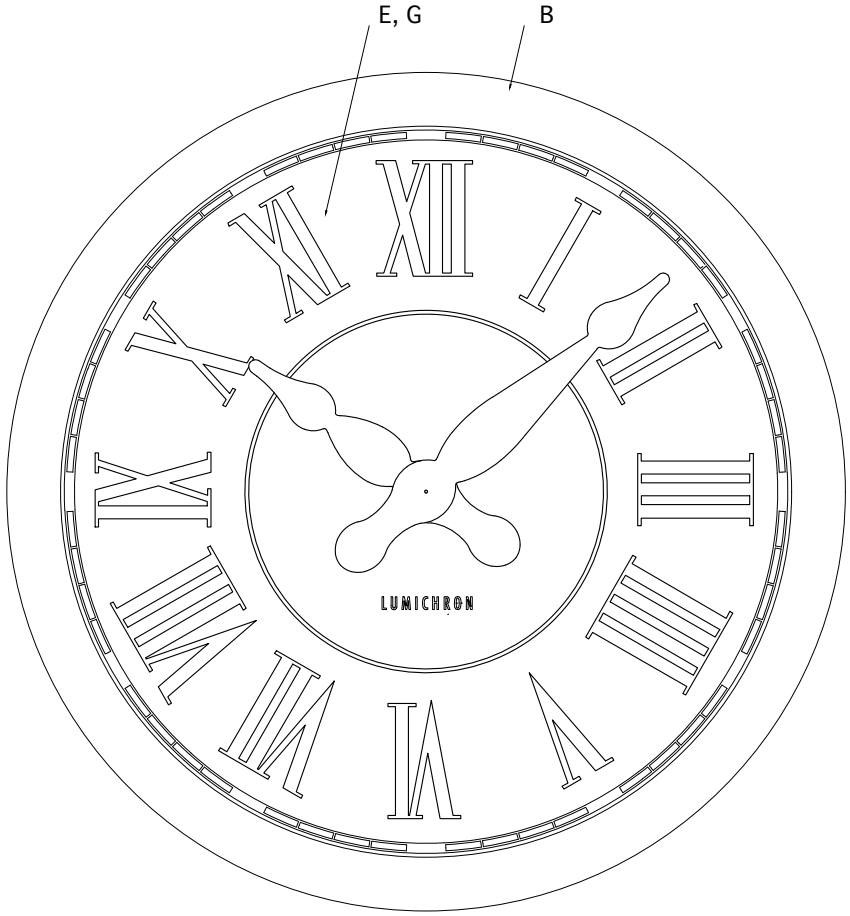

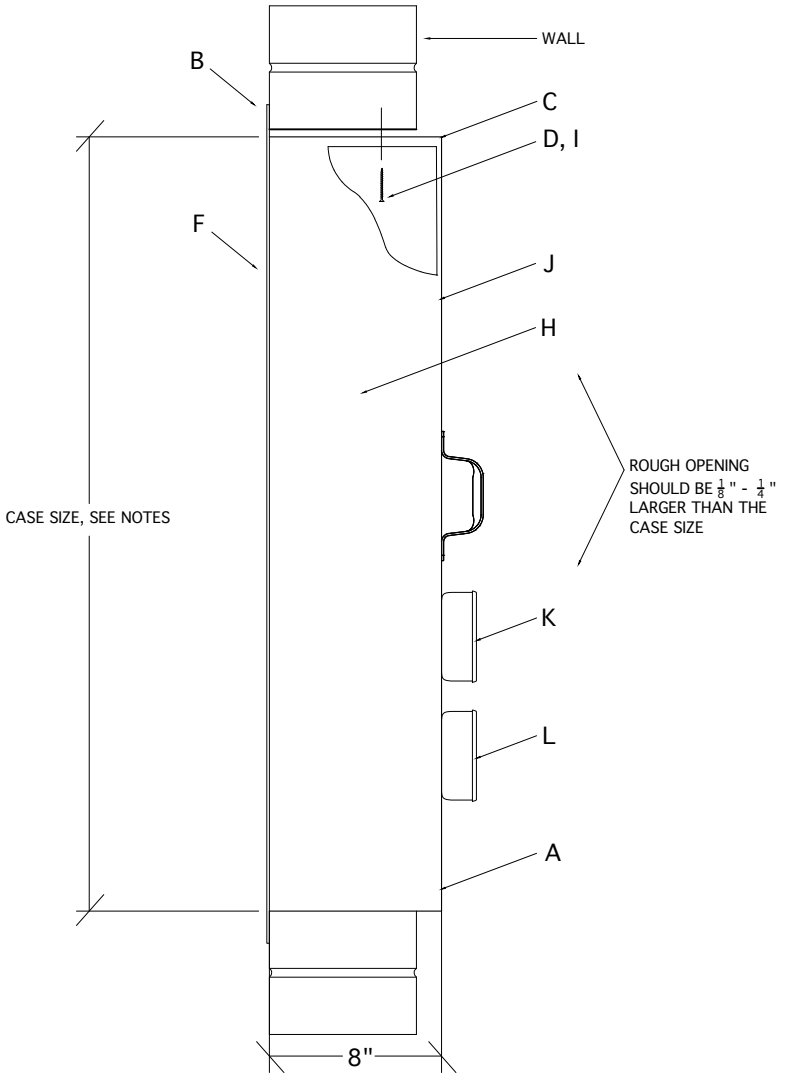

FEATURES	
A	FULLY ENCLOSED ALL-ALUMINUM CASE, SCREENED VENT ON BACK
B	1-1/2" FLANGE FOR MOUNTING, LIP OVER ROUGH OPENING
C	8" OF CLOCK BODY THROUGH THE WALL
D	CLOCK FASTENS WITH 8 INSIDE SCREWS TO JAMS
E	ILLUMINATION (SEE WIRE DIAGRAM), BACK-LIT WITH WHITE 100,000 HR SIGN-GRADE LED'S (SPECIFY COLOR TEMPERATE AS NEEDED)
F	TEMPERED GLASS CRYSTAL PROTECTING THE DIAL AND HANDS
G	TRANSLUCENT WHITE SIGN-GRADE, UV PROTECTED, POLYCARBONATE DIAL
H	ARCHITECTURAL GRADE POWDER COATING
I	STAINLESS STEEL FASTENERS THROUGHOUT
J	COMPLETE SERVICE ACCESS THROUGH REMOVABLE BACK AND BUTTERFLY DOORS
K	J-BOX FOR 24V MOVEMENT CONTROL WIRE, CONNECT TO MASTER CLOCK CONTROLLER LENGTH TBD, MAX 400'
L	J-BOX FOR ILLUMINATION, 120V, .7 AMP, CONTROL BY OWNER

NOTES:
DEDUCT 2" FROM CASE DIAMETER FOR FACE OPENING
ADD 3" TO CASE DIAMETER OR FLANGE OVERLAP

CASE TO FIT OPENING, SPECIFY EXACT CASE SIZE OD

ORDERING KEY		AA-BB-CC-DD (SHOWN): FM-36-STD. ROMAN/ROMAN SPADE*-BLACK)
AA	MODEL NUMBER	FM
BB	SIZE	20" MIN - 48" MAX (36" SHOWN)
CC	DIAL/HAND	SEE SEPARATE SELECTION PAGES*
DD	COLOR	BLACK (DEFAULT), BRONZE, SILVER, GREY, SPEC.

TITLE:
CASE CLOCKS FLUSH/INSET MOUNTED, UP TO 48" DIAMETER WITH CRYSTAL ILLUMINATED

SCALE:	DATE:	DRAWN:	CHECKED:
N/A			
DRAWING NO:	REVISION:		

LUMICHRON COMMERCIAL CLOCKS
LUMICHRON.COM
11460 Dorsett Road, Maryland Heights, MO 63043
616-245-8888 SALES@LUMICHRON.COM